


Adjustable weldable double rail clip STS16DR




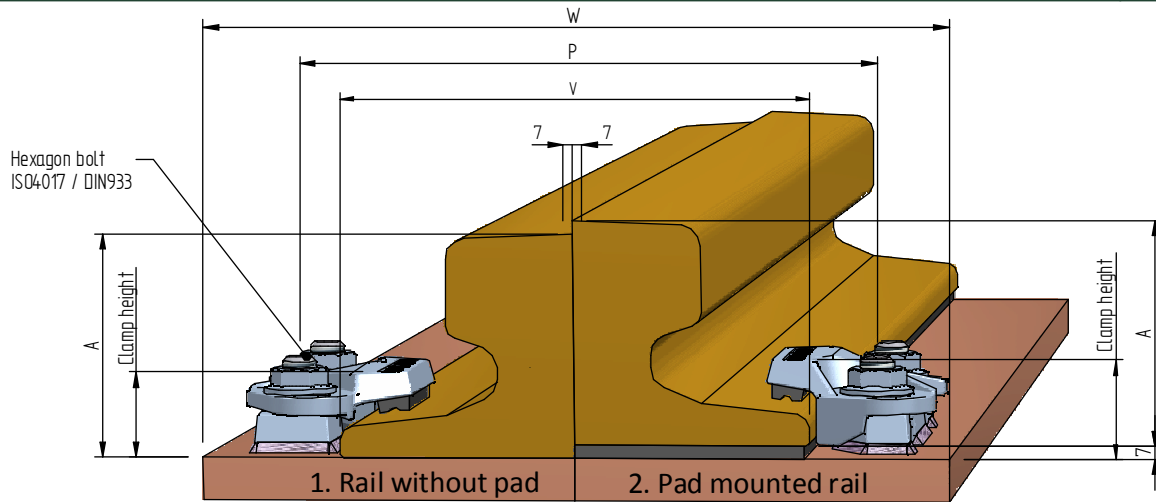


Clamp height
S = 35 [mm]
L = 41 [mm]

	Inside distance between baseplates			V	Rail base + 14	[mm]
	Distance between bolts M16			P	Rail base + 55	[mm]
	Minimum width sole plate			W	Rail base + 100	[mm]
	F [mm]	C [mm]	A [mm]	1. Rail without pad		2. Pad mounted rail
A65	175	65	75	STS16RD S	STS16RD L	
A75	200	75	85	STS16RD S	STS16RD L	
A100	200	100	95	STS16RD S	STS16RD L	
A120	220	120	105	STS16RD S	STS16RD L	
MRS51	127	64	127	STS16RD S	STS16RD L	
MRS67	132	76	146	STS16RD S	STS16RD L	
ISCR70	120	70	120	STS16RD S	STS16RD L	
ISCR80	130	80	130	STS16RD S	STS16RD L	
ISCR100	150	100	150	STS16RD S	STS16RD L	
ISCR120	170	120	170	STS16RD S	STS16RD L	
QU70	120	70	120	STS16RD S	STS16RD L	
QU80	130	80	130	STS16RD S	STS16RD L	
QU100	150	100	150	STS16RD S	STS16RD L	
QU120	170	120	170	STS16RD S	STS16RD L	
40E1 (S41-R14)	125	67	138	STS16RD S	STS16RD L	
41E1 (S41-R10)	125	67	138	STS16RD S	STS16RD L	
49E1 (S49)	125	67	149	STS16RD S	STS16RD L	
S54	125	67	154	STS16RD S	STS16RD L	
46E3 (NP46)	120	72	142	STS16RD S	STS16RD L	
50E2 (EB50T)	140	67	151	STS16RD S	STS16RD L	
EB63	140	72	151	STS16RD S	STS16RD L	
54E1 (UIC54)	140	70	159	STS16RD S	STS16RD L	
60E1 (UIC60)	150	72	172	STS16RD S	STS16RD L	

Specification	Grade 8.8 Hex. bolt	Welding: The entire base Fillet welding $\nabla 5$	
Maximum side load	170 [kN]	Fixing bolts: Hexagon headscrew ISO4017 / DIN933	
Tightening torque	200 [Nm]	Steel grade 8.8 HDG	

Adjustable weldable double rail clip STS16DR L

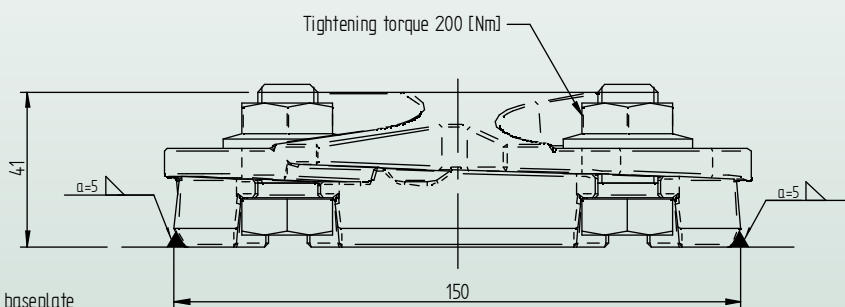
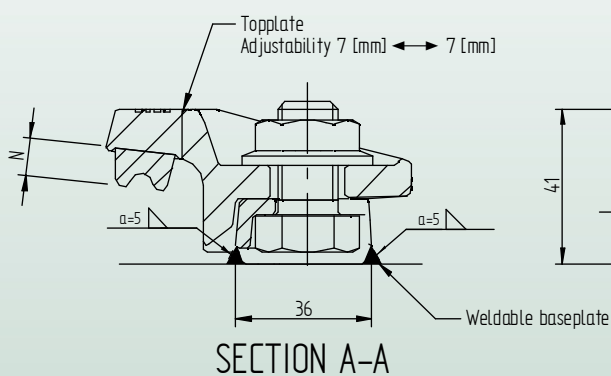
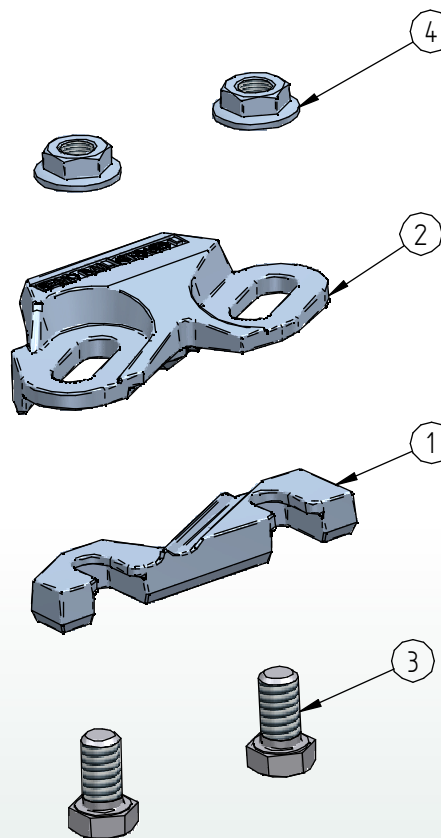
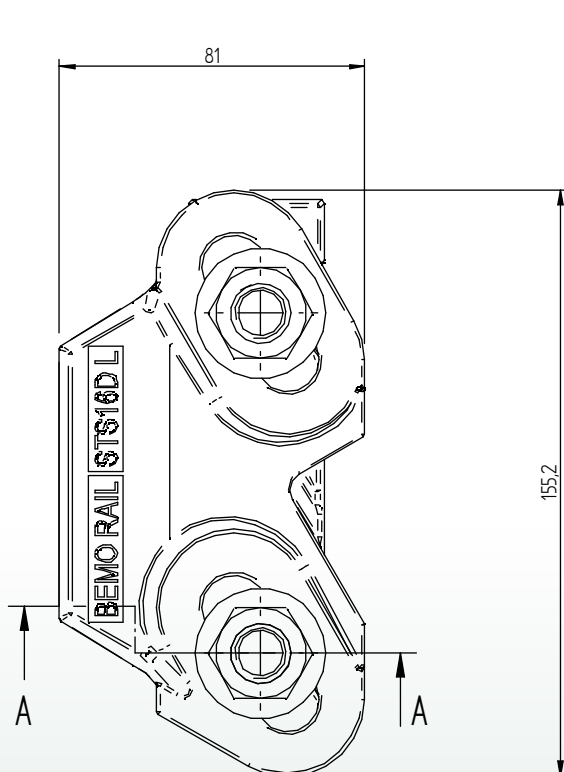


Name	N
STS16DRC L N9	9,0 [mm]
STS16DRC L N11	11,0 [mm]
STS16DRC L N13	13,0 [mm]

* Standard preservation is hot dip galvanized.
Other preservation options in agreement

4	Low Hexagon flange nut	Grade 8 H.D.G.	M16 ISO-metric	-	m = 0,044 [kg]
3	Hexagon head screw	8.8 ZP.	M16x30	DIN933	
2	Weldable adjustable rail clamp cover L with rubber nose	S355J2*	STS16DC L		m = 0,830 [kg]
1	Weldable adjustable rail clamp base	S355J2 self coloured	STS16DB		m = 0,409 [kg]
Item	Description	Material	Type / Dimensions	Norm	Comments

Adjustable weldable double rail clip STS16DR S

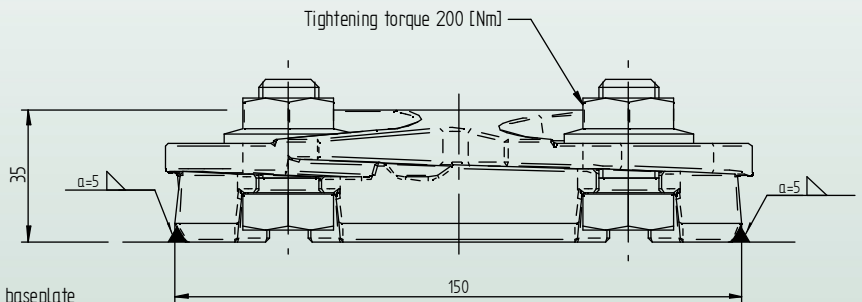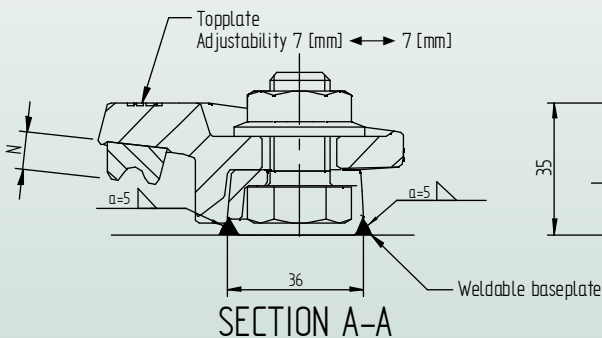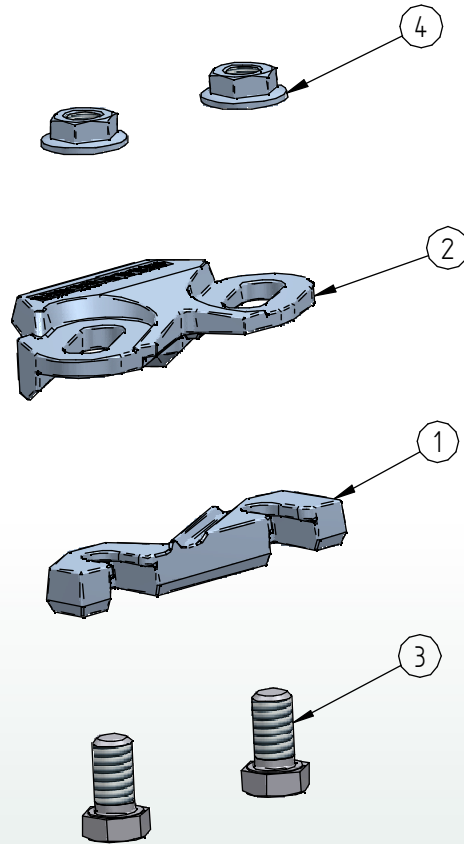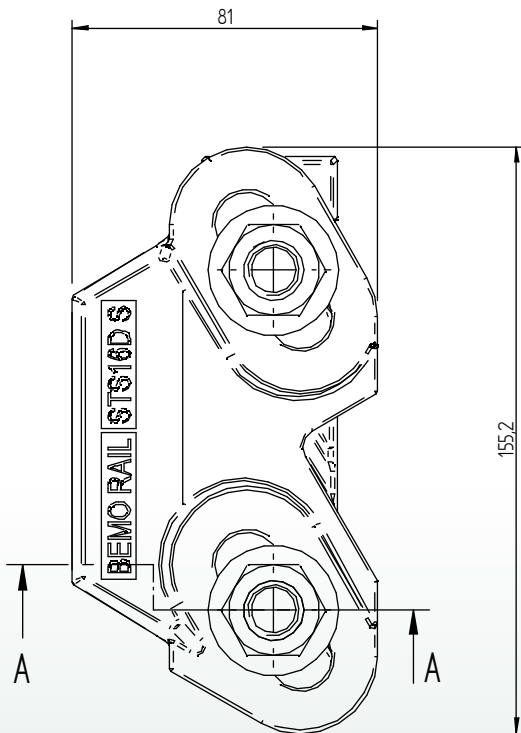

Name	N
STS16DRC S N9	9,0 [mm]
STS16DRC S N11	11,0 [mm]
STS16DRC S N13	13,0 [mm]

* Standard preservation is hot dip galvanized.
Other preservation options in agreement

4	Low Hexagon flange nut	Grade 8 H.D.G.	M16 ISO-metric	-	m = 0,044 [kg]
3	Hexagon head screw	8.8 ZP.	M16x30	DIN933	
2	Weldable adjustable rail clamp cover S with rubber nose	S355J2*	STS16DC S		m = 0788 [kg]
1	Weldable adjustable rail clamp base	S355J2 self coloured	STS16DB		m = 0,409 [kg]
Item	Description	Material	Type / Dimensions	Norm	Comments