


Standard continuous supported sole plate for weldable clamps

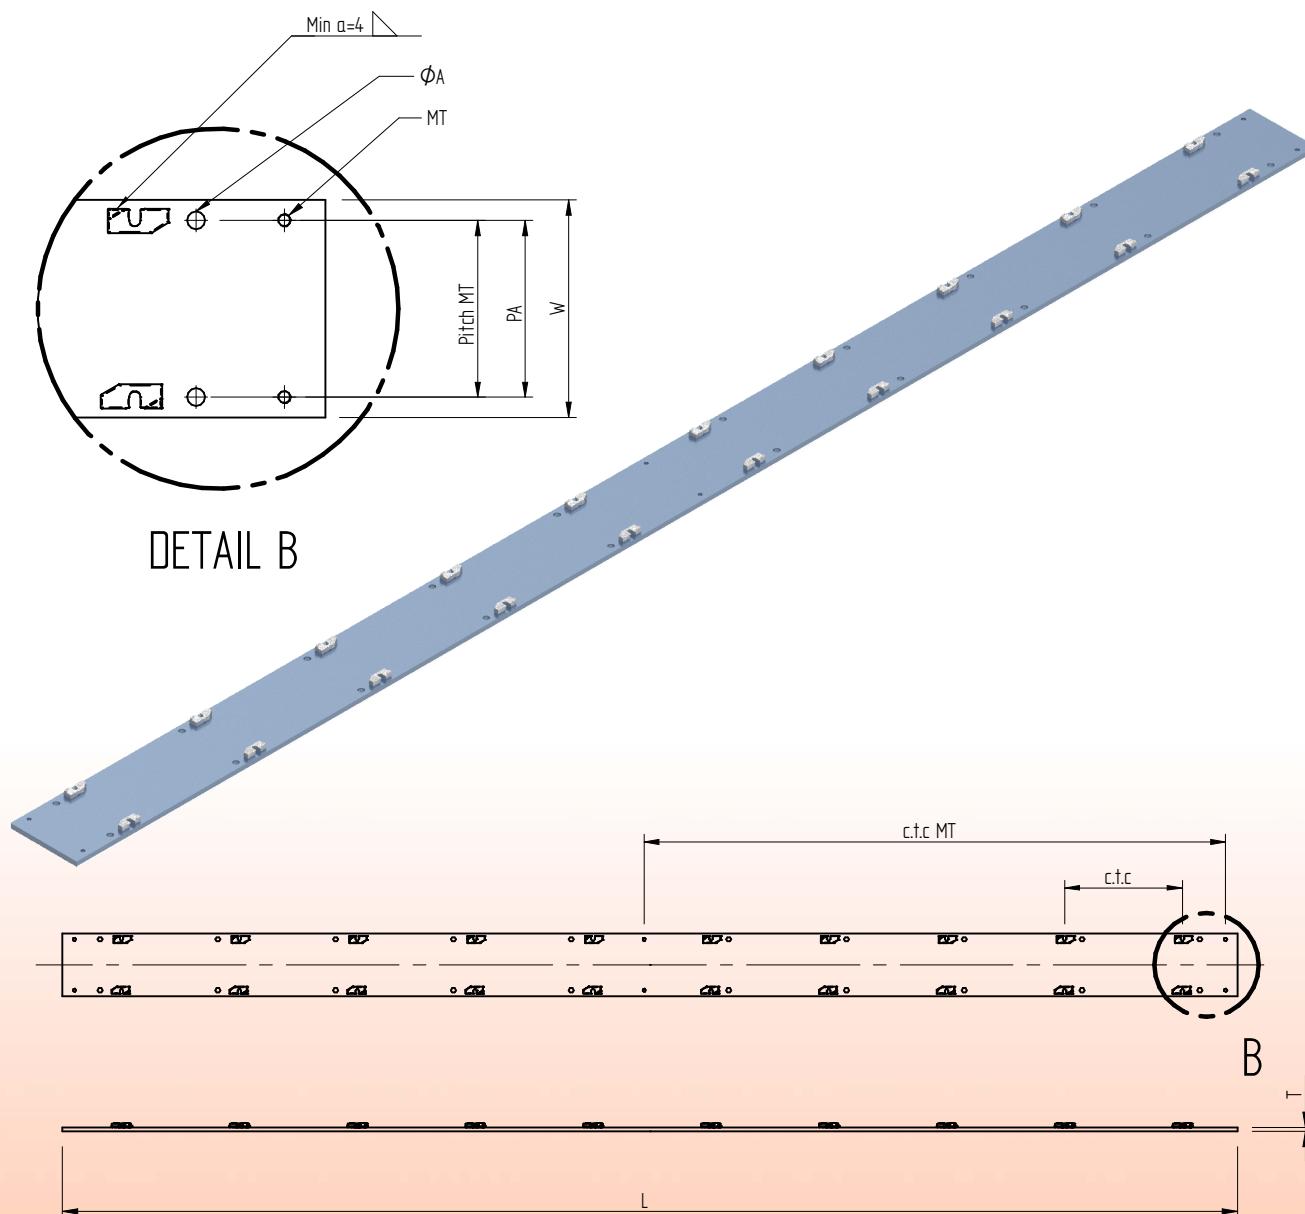

Characteristics of continuous supported sole plate:

- Length: Standard 5980 ± 5 [mm].
- Width: Varying between 150 and 500 [mm].
- Thickness: Varying between 12 and 50 [mm].
- Material: S235JR, S275JR, S355J2.
- Preservation: coating, duplex system, hot dip galvanized, or Self-coloured
- Tolerances: According to NEN EN 10029, Thickness class D, Flatness class N
- Weld thicknesses: a4, a5, a6

Type rail profile		
Type rail clamp		
Width soleplate	W	
Thickness soleplate	T	
Length sole plate	L	
Anchor bolt holes	ØA	
C.t.c. Anchor bolt holes	PA	
C.t.c. Rail clamps/Anchors	c.t.c	
Levelling bolt holes	Pitch MT	
C.t.c. Levelling bolts	c.t.c MT	



BemoRail

Debbemeerweg 59
1749 DK Warmenhuizen
The Netherlands

Tel.: +31 (0)226 425300
Email: info@bemorail.nl
www.bemorail.com